

KZS-1M 1p+N A B16/0.03 6kA



Specifications

ETI Code	002175204
Description	KZS-1M 1p+N A B16/0.03 6kA
Class name	RCBO
Short circuit capacity (kA)	6
Tripping characteristic	B
Rated current (A)	16
Type	A
Rated voltage (V)	230
No. Of poles	1+N
Rated Frequency (Hz)	50 Hz
Standards	IEC 61009
Terminals (mm ²)	1-10
Rated residual operating current I _{Δn} (A)	0.03
Tripping time	Instantaneous
0	

Online product page

Other documentation



Technical data catalogue

Certificate

3D Model

Instruction manual


CE declaration

Eplan file

ETIM international clasification

Classification	EC000905
Class name	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Nominal rated voltage	230V
Nominal rated current	16A
Rated fault current	0.03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity acc. EN 61009	6kA
Release characteristic	B
Concurrently switching N-neutral	
Width in number of modular spacings	1
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...10mm ²
Connectable conductor cross section multi-wired	1...10mm ²


Dimension drawing

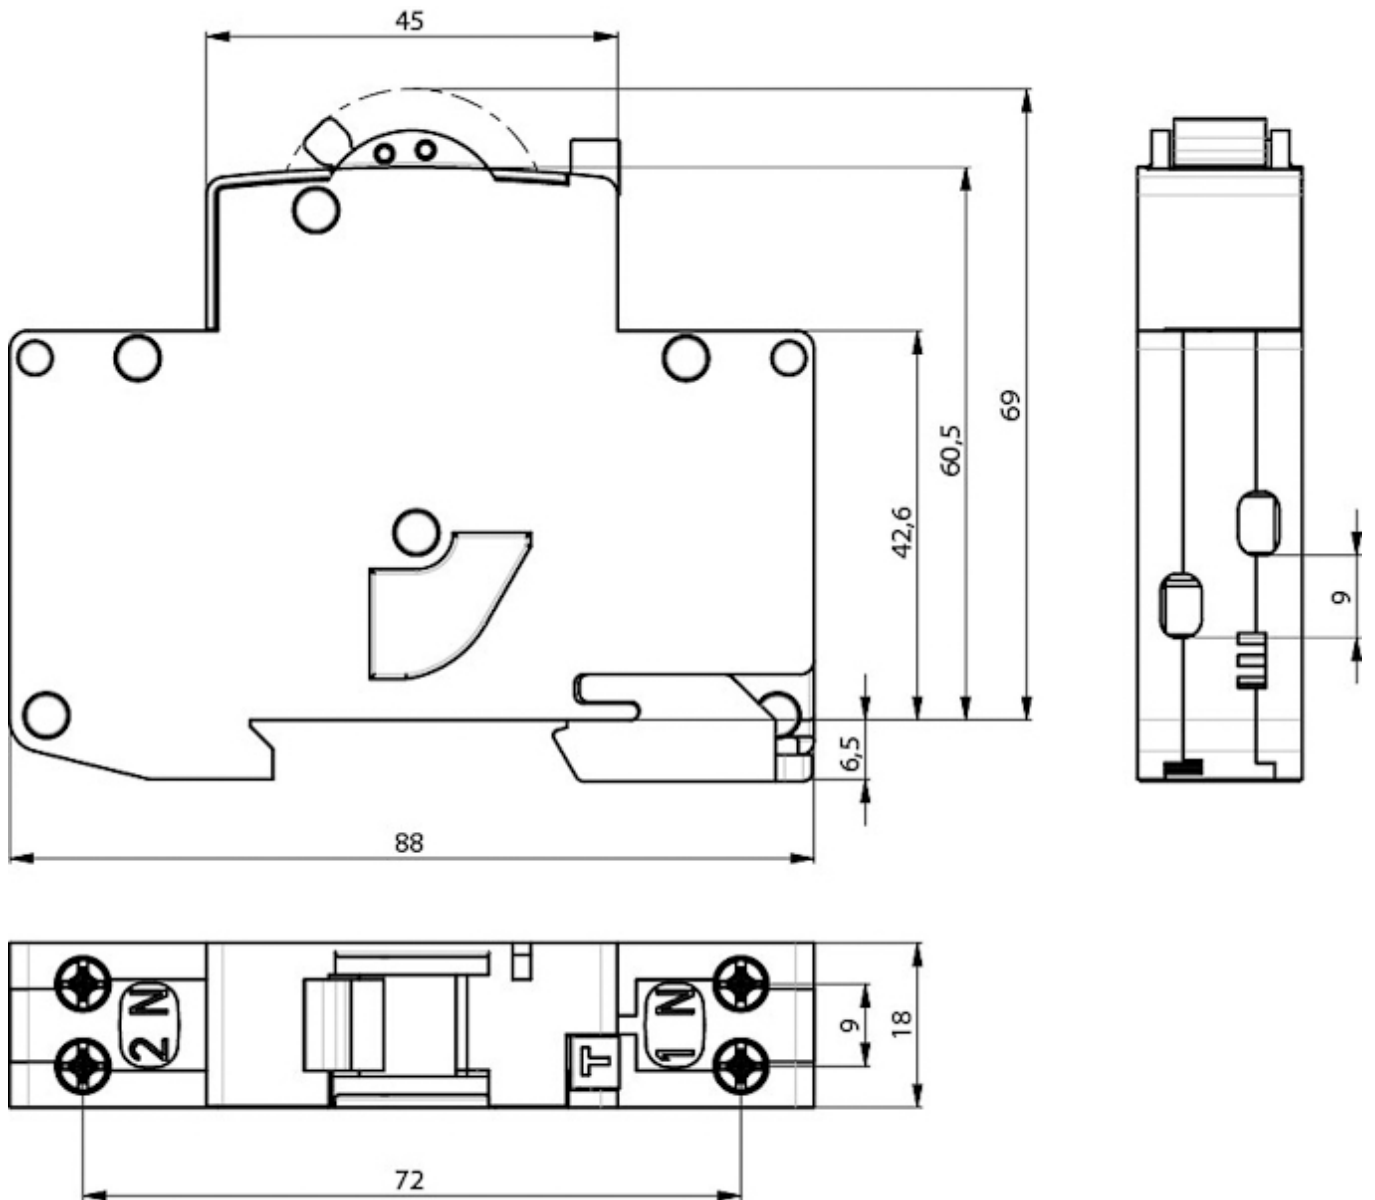

Symbol/Connection

LOAD

2 N

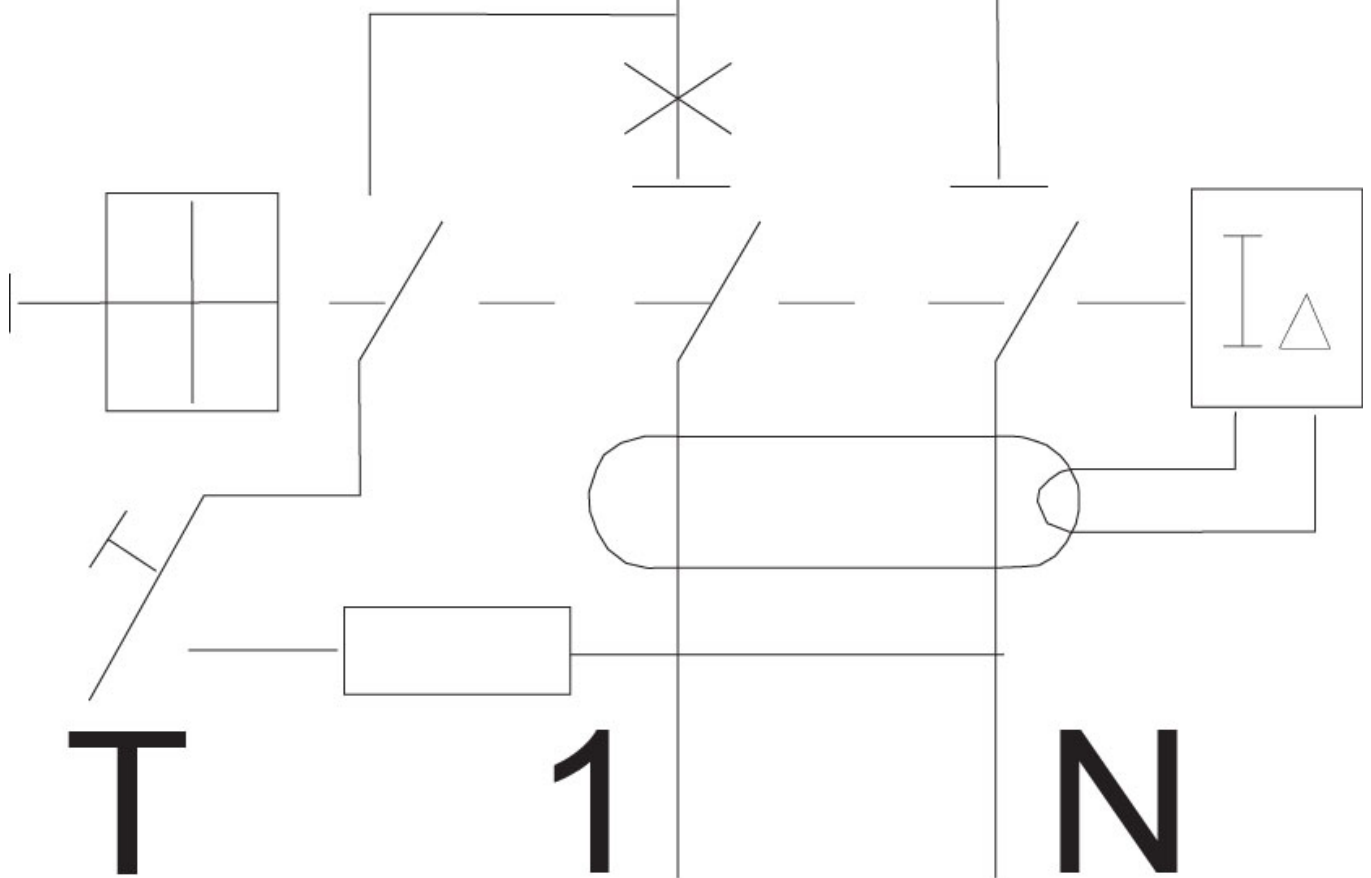

T

1

N

LINE